


# ECVT ECO-VAPOUR TIGHT LED

**ecoLED**<sup>™</sup>  
A DIVISION OF **ecopower**

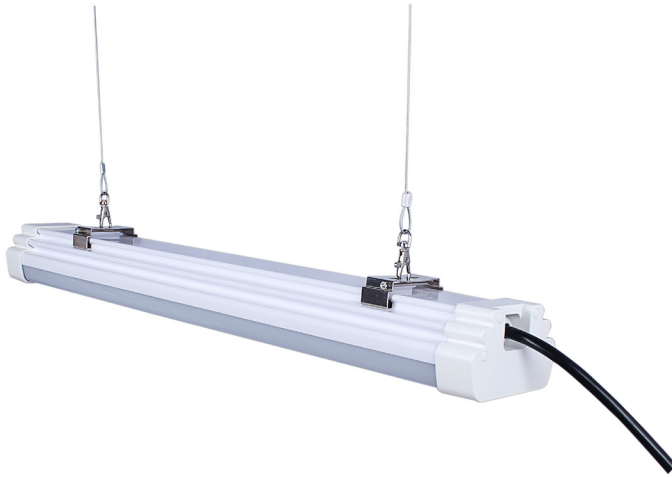

## FEATURES

- Vandal resistant
- High impact resistant
- Corrosion free
- Quick install, seamless row mounting
- 0-10vDC dimming standard
- Multiple installation methods
- Cost effective

## OPTIONS

- Remote control
- Emergency battery backup
- Seamless connectors
- Hand held remote control (emergency backup and dimming setup)
- Daylight harvesting
- Hi/lo output on occupancy sensor

ECVT - Eco-Vapour tight LED 120 L/W Premium listed wide beam angle vapor tight series featuring standard 0-10vDC dimming. Available with emergency battery backup, hi/lo dimming, remote handheld control and daylight harvesting.

### TECHNICAL SPECIFICATIONS

Housing	Vandal resistant, hidden fasteners, polycarbonate lens and high impact fire resistant polymer body
Finish	White on white
Lens	Frosted or clear
Mounting	Surface mount standard. Row mounting or suspension options.
Applications	Outdoor or indoor, agricultural, food service, processing, manufacturing, task lighting, canopy, commercial/ industrial hallways, stairwells, auditoriums, schools, gymnasiums, locker rooms, high humidity and coastal areas. Ideal for Parking lots with its 270° beam angle, supermarkets, MTR stations, airports.

### OPTICAL & PERFORMANCE SPECIFICATIONS

IP Rating	IP65
CRI	>82
Beam Angles	270°
L70	50,000 hours
Efficacy	120 Lumens per watt
Certifications	cETL, FCC, meets all CSA and UL standards, CE, RoHS, LM80, LM79 and qualifies for all N.A. incentives, contact quotes@ecopowered.com for further info



### ELECTRICAL SPECIFICATIONS

Lighting Source	Samsung LED
Available Wattages	2': 20w   4': 36w, 45w   8': 70w
Power Factor	>0.9
Ambient temperature	-20° to 55°C
Available Voltages	100-277v standard

**ecoCONTROLS**<sup>™</sup>  
INTEGRATIONS




info@ecopowerinc.com | ecoled.ecopowerinc.com | 1.800.564.8086



A Canadian  
Manufacturer

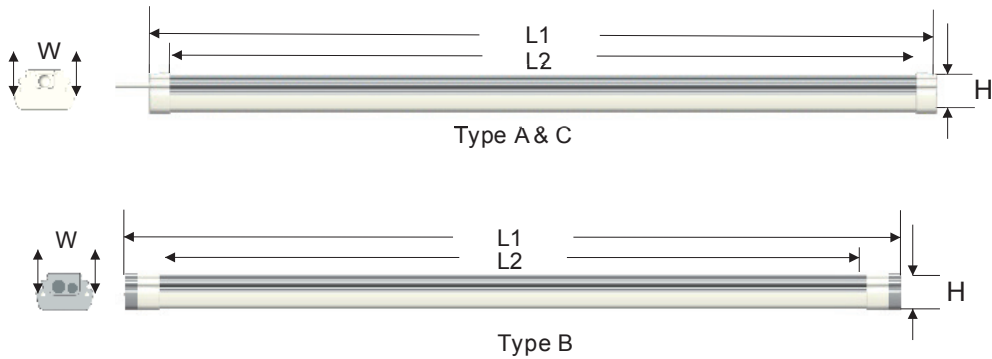


## DIMENSIONS



Model	L1(mm)			L2(mm)			W(mm)			H(mm)		
	A	B	C	A	B	C	A	B	C	A	B	C
2ft - 20w	600	650	600	540			94			60		
4ft - 36w	1500	1250	1200	1140			94			60		
4ft - 45w	1200	1250	1200	1140			94			60		
8ft - 70w	2400	2450	2400	2340			94			60		

**PRODUCT CODE GENERATOR** Some combinations of adders may not be possible, email quotes@ecopowerinc.com for further info.

ECVT					-	
	Size (')	Wattage	Kelvin	Voltage		Options
	2	20w	WW (3000K) NW (4000K) CW (5000K)	V4 (100-277vAC)		B30 Battery back up – 6w 3 hour 0-10v dimmable included
	4	36w 45w				H06 Single hook hanger 10' (set of 2 for 2-5'/set of 3 for 8')
	8	70w				RC Remote Control for Emergency Backup/Dimming
						PG9 Waterproof Connector
						SC Seamless Connector
						L1 Clear Lens*
						L2 Frosted lens

\*MOQ 100pcs  
MOQs do not apply to in-stock product.

# ECVT ECO-VAPOUR TIGHT LED


ecOLED™  
A DIVISION OF ecPOWER

## ECOCONTROLS INTEGRATION

ecCONTROLS™  
POWERED BY nebula

**Light when you need it. Savings when you don't.**

Advanced sensors work in combination with dimming to provide full illumination only when needed, returning to a reduced level when the area is unoccupied - saving overhead on energy costs. EcoCONTROLS control systems use artificial intelligence to predict peak times on the grid and provides advanced notice about potentially expensive time, allowing you to take action to further minimize your costs by reducing your power draw.

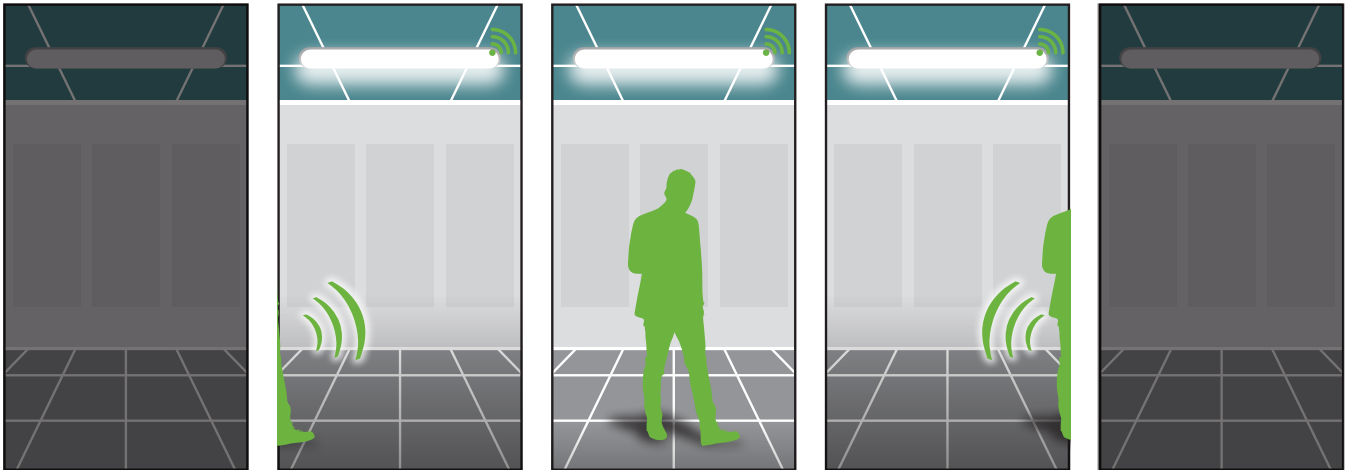

info@ecopowerinc.com | ecoled.ecopowerinc.com | 1.800.564.8086



A Canadian  
Manufacturer

©2019 Ecopower Inc. All rights reserved.  
REV-0328.19-085536